10"-507 WITH TNA OPERATOR AND 2" NUT

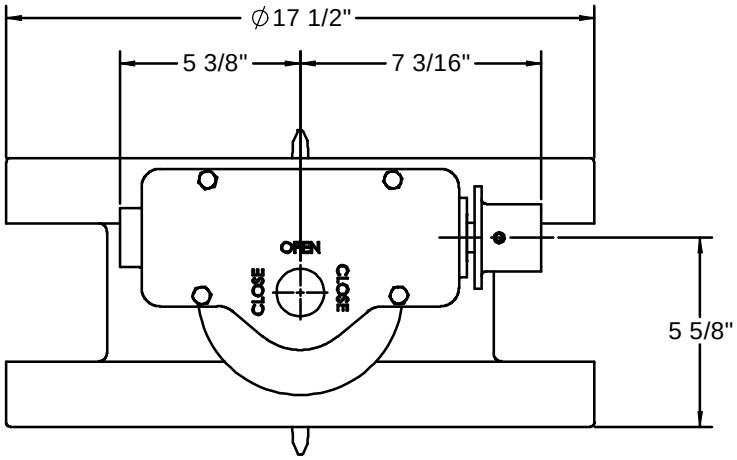

♦ OPTIONAL CONFIGURATION



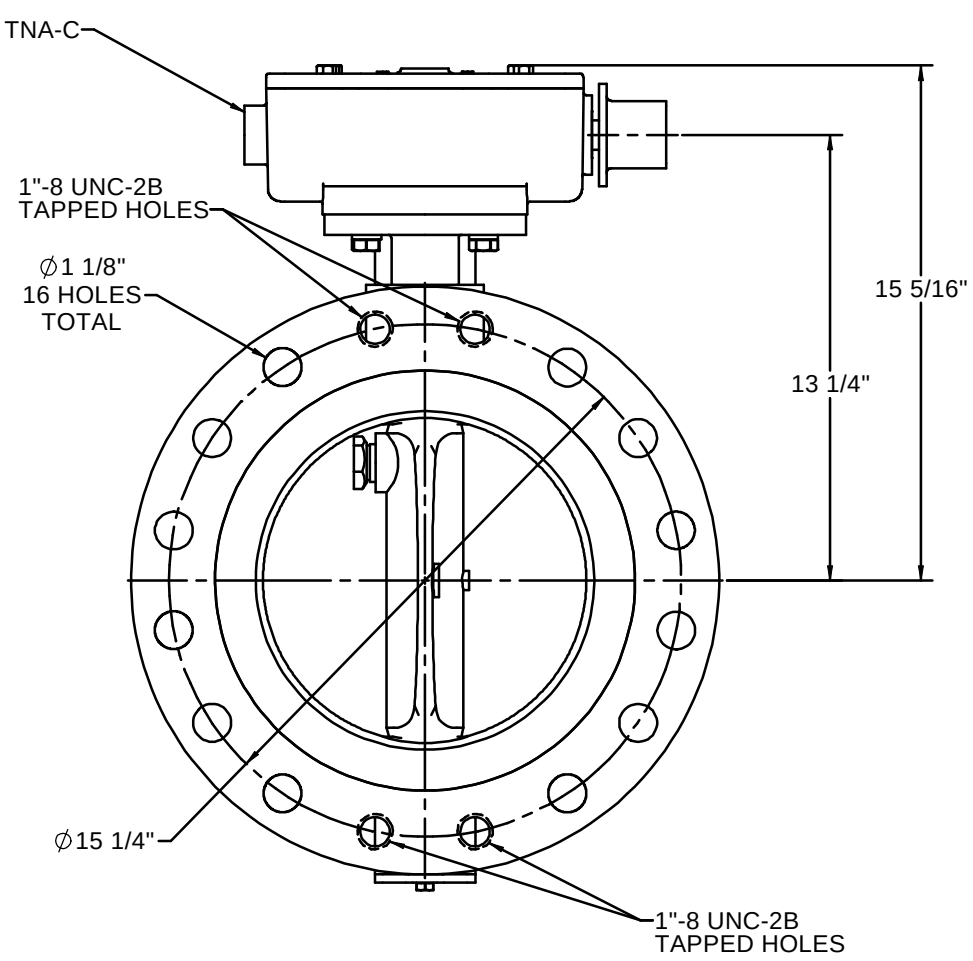

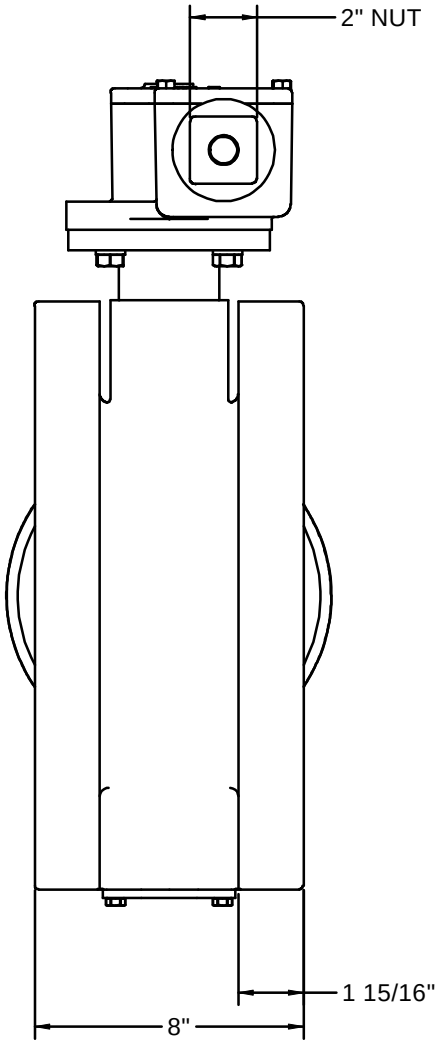

NOTES:

1. 250 PSIG MAXIMUM WORKING PRESSURE.
2. THIS VALVE CONFORMS TO AWWA C504.
3. FLANGES AND DRILLING PER ANSI 16.1 CLASS 250.
4. ASTM A536 GR. 65-45-12 DUCTILE IRON BODY.
   ASTM A536 GR. 65-45-12 DUCTILE IRON DISC WITH 316 SST EDGE.
   ASTM A564 TYPE 630 (17-4PH) STAINLESS STEEL SHAFT.
5. VALVE IS DESIGNED FOR BI-DIRECTIONAL FLOW.
6. VALVE MAY BE INSTALLED WITH SHAFT IN EITHER HORIZONTAL OR VERTICAL POSITION.
7. ALL DIMENSIONS ARE IN INCHES.
8. VALVE DISC AND EXTERIOR WILL BE COATED WITH 8 MILS EPOXY.

K-FLO
BUTTERFLY VALVES
BY
CRISPIN VALVES

10"-507 SERIES
BUTTERFLY VALVE
TNA OPERATOR

REDRAWN:		SIZE		REV
CHECKED:		C	10-507 TNA	0
DRAWN: C. GEARY	02/24/09			