

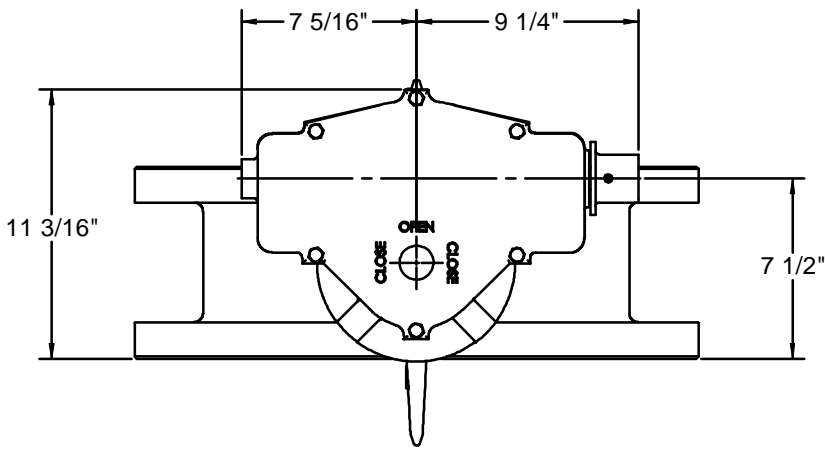
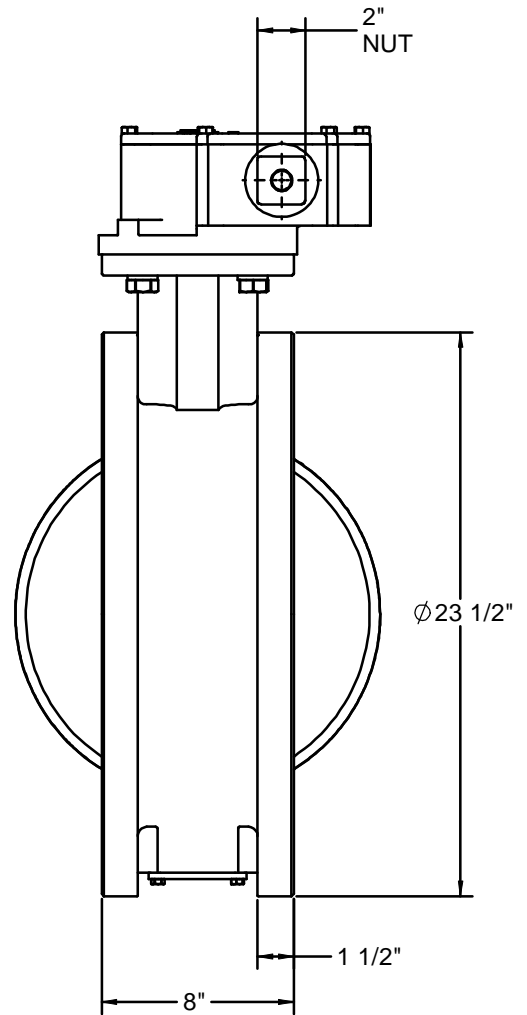


# 16"-504 WITH TNA OPERATOR AND 2" NUT

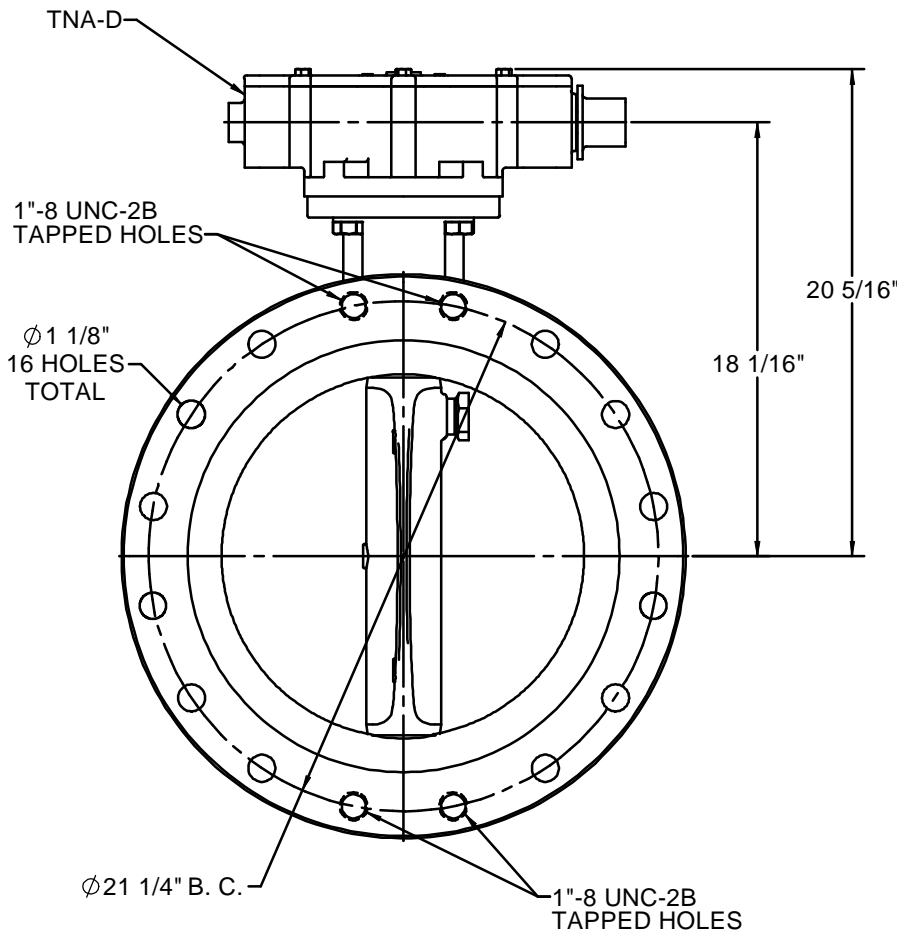

◆ OPTIONAL CONFIGURATION

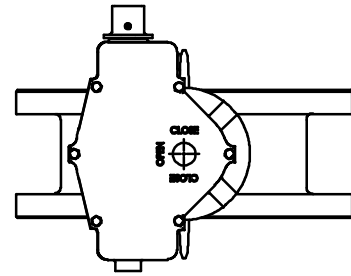

**NOTES:**

1. 150 PSIG MAXIMUM WORKING PRESSURE.
2. THIS VALVE CONFORMS TO AWWA C504.
3. FLANGES AND DRILLING PER ANSI 16.1 CLASS 125.
4. ASTM A126 GL. B CAST IRON BODY.  
ASTM A536 GR. 65-45-12 DUCTILE IRON DISC WITH 316 SST EDGE.  
ASTM A276 TYPE 304 STAINLESS STEEL SHAFT.
5. VALVE IS DESIGNED FOR BI-DIRECTIONAL FLOW.
6. VALVE MAY BE INSTALLED WITH SHAFT IN EITHER HORIZONTAL OR VERTICAL POSITION.
7. ALL DIMENSIONS ARE IN INCHES.
8. VALVE DISC AND EXTERIOR WILL BE COATED WITH 8 MILS EPOXY.

**K-FLO**  
 BUTTERFLY VALVES  
 BY  
 CRISPIN VALVES

16"-504 SERIES  
 BUTTERFLY VALVE  
 TNA OPERATOR

|                 |          |      |   |     |   |
|-----------------|----------|------|---|-----|---|
| REDRAWN:        |          | SIZE | C | REV | 0 |
| CHECKED:        |          |      |   |     |   |
| DRAWN: C. GEARY | 02/24/09 |      |   |     |   |