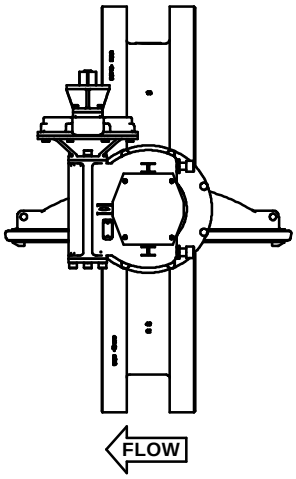

ASS'Y: "B1" (STD. MOUNTING)

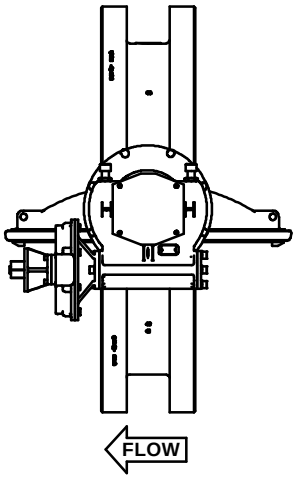

ASS'Y: "B2"

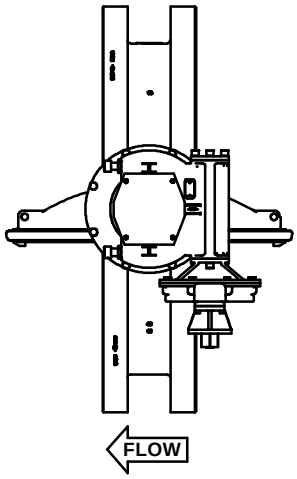

ASS'Y: "B3"

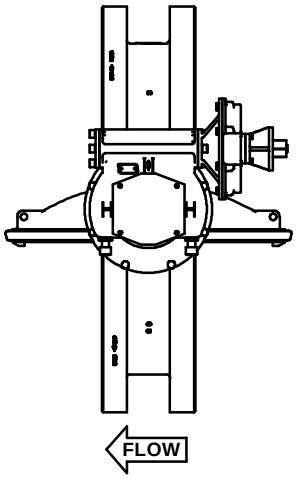

ASS'Y: "B4"

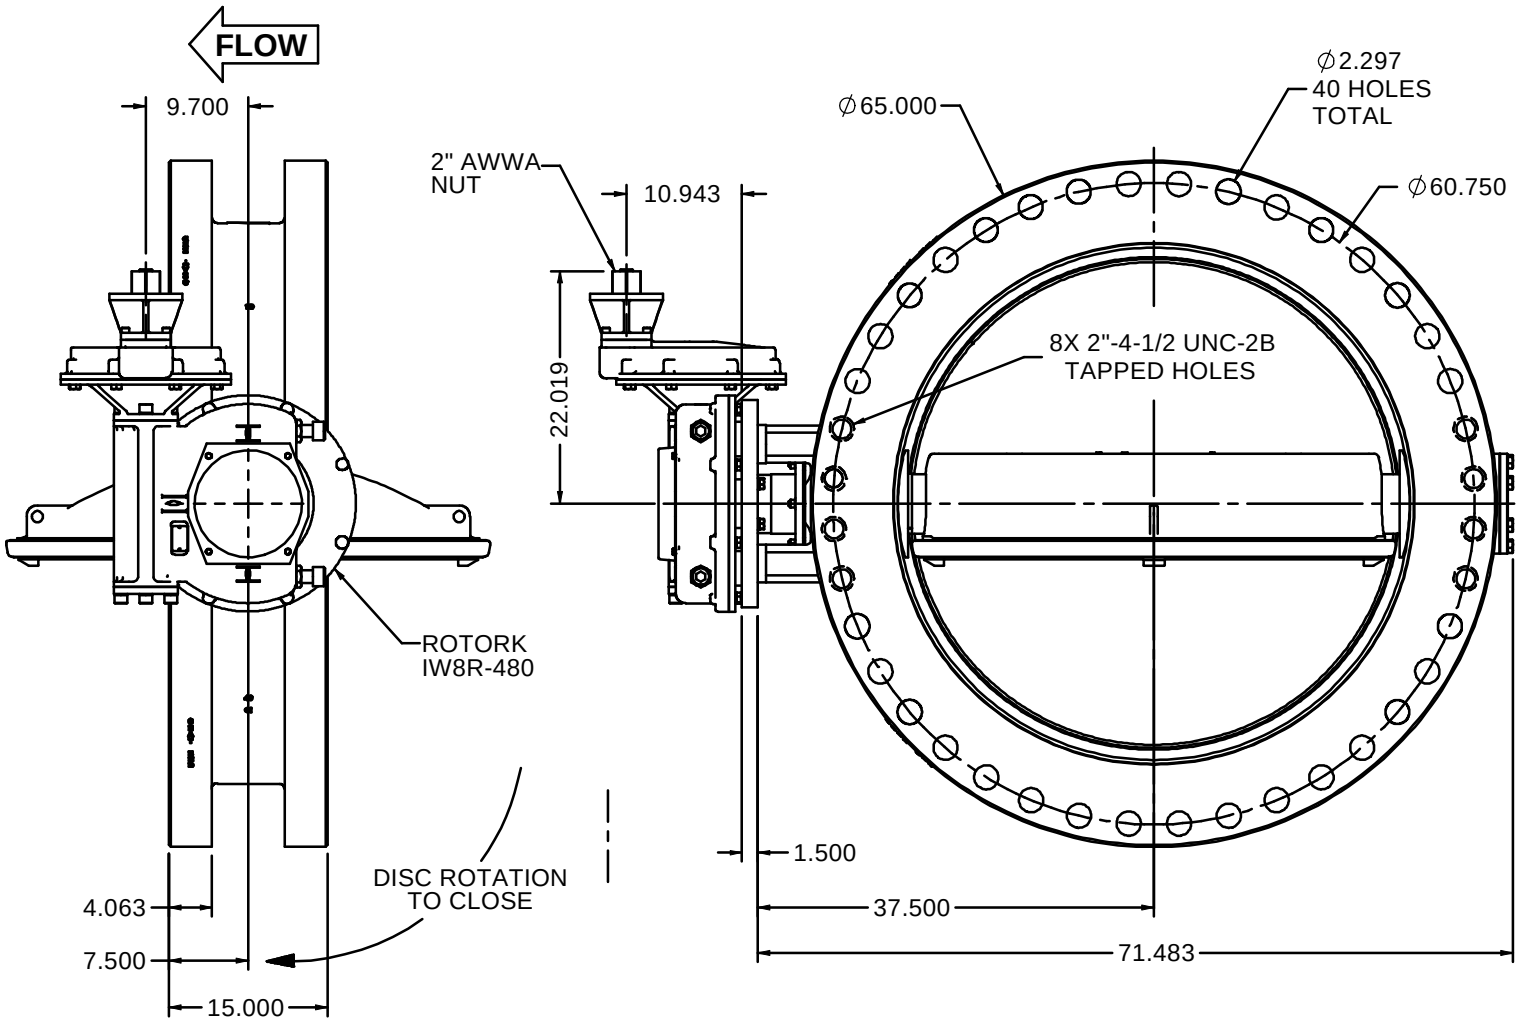

NOTES:

1. 250 PSIG MAXIMUM WORKING PRESSURE.
2. THIS VALVE CONFORMS TO AWWA C504.
3. FLANGE DIMENSIONS & DRILLING COMPLIES TO ASME B16.1 CL. 250.
4. ASTM A536 GR. 65-45-12 DUCTILE IRON BODY AND DISC.
5. ASTM A564 TYPE 630 (17-4PH) STAINLESS STEEL SHAFTS.
6. GEAR ACTUATOR IS DESIGNED FOR 450 FT-LB INPUT TORQUE MAX.
7. FLOW RECOMMENDED IN DIRECTION SHOWN. (SEAT DOWNSTREAM)
8. VALVE MAY BE INSTALLED WITH SHAFT IN EITHER HORIZONTAL OR VERTICAL POSITION.
9. ROTATE NUT CLOCKWISE TO CLOSE VALVE.
10. ALL DIMENSIONS ARE IN INCHES.

REV	DATE	BY	APPD	REVISION

REDRAWN:
CHECKED:
DRAWN: C. GEARY 04/20/10

K-FLO
BUTTERFLY VALVES
BY
CRISPIN VALVES

48"-475 FLANGED
BUTTERFLY VALVE
WITH ROTORK IW8R-480
AND 2" NUT

SIZE	DWG. NO.	REV
C	48-475 IW8 450	0