


8 7 6 5 4 3 2 1

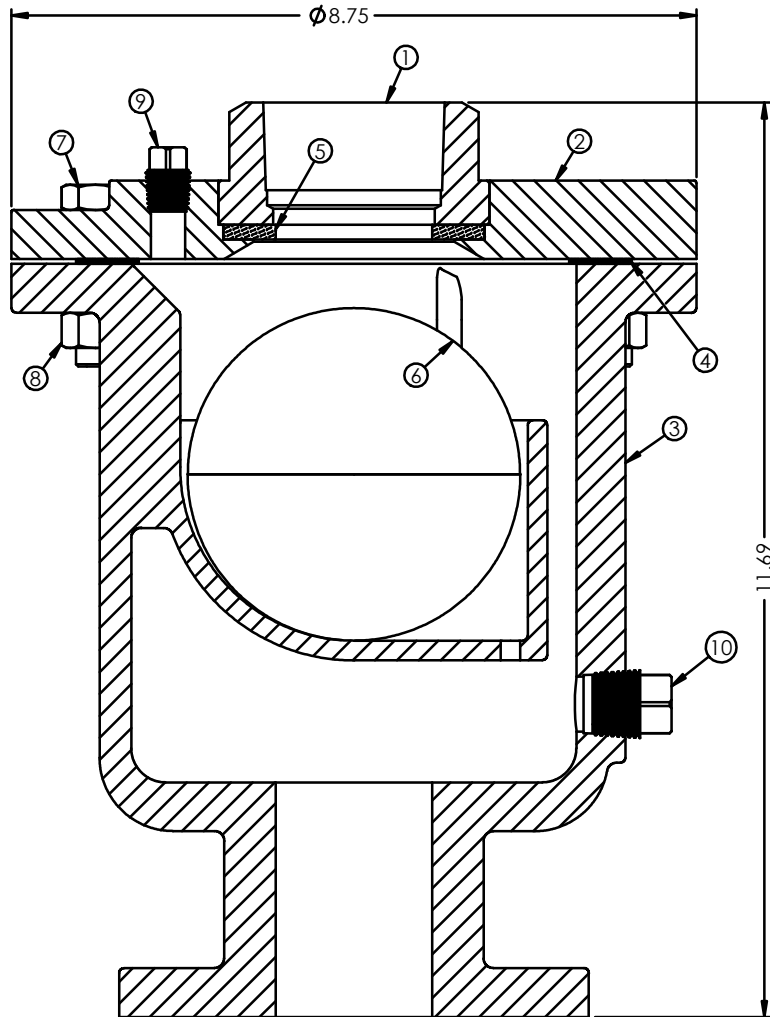

AIR / VACUUM VALVE PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	3-1S	TOP	DUCTILE IRON	1
2	3-2C	COVER FLANGE	DUCTILE IRON	1
3	3-3CF	BODY	DUCTILE IRON	1
4	3-4	COVER GASKET	ARMSTRONG	1
5	3-5	AIR / VAC SEAT	BUNA-N RUBBER	1
6	3-6S	FLOAT	STAINLESS STEEL	1
7	HHCS.5X2.0	COVER BOLT	STEEL	6
8	FHN.5-13	COVER NUT	STEEL	6
9	PLG.25	FLANGE PLUG	BRASS	1
10	PLG.5	BODY PLUG	BRASS	1

FLANGE DATA	
FLANGE DIAMETER	6.00 in.
FLANGE THICKNESS	0.75 in.
BOLT CIRCLE DIAMETER	4.75 in.
NUMBER OF BOLT HOLES	4
BOLT HOLE DIAMETER	0.75 in.

- NOTES:**
1. INLET SIZE: 2" CL.150 FLANGE  
OUTLET SIZE: 2" NPT
  2. APPROXIMATE WEIGHT: 48 lbs
  3. VALVE WILL BE COATED EXTERNALLY WITH PHENOLIC ALKYD PRIMER

REV.	DESCRIPTION	DATE	APPROVED
1	REDRAWN IN SOLIDWORKS		

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES			
XX DIMENSIONS	+ .1		
XXX DIMENSIONS	+ .01		
XXXX DIMENSIONS	+ .005		
DRILLED HOLES	+ .01		
ANGLES	+ .1		
CONCENTRIC DIAMETERS	SEE BELOW		
MACHINED	.005 TIR		
MACHINED TO CAST	.02 TIR		
MACHINED SURFACES	125 BMS		
DRIFTPIN SURFACES			
BREAK SHARP EDGES			
MATERIAL:	FILE LOCATION:		
FINISH:	FILE NAME:	AL21 r1	

**CRISPIN VALVES**

TITLE:  
2" CL. 150 AIR / VACUUM  
RELEASE VALVE

SIZE DWG. NO. REV  
**B** AL21 1

SCALE: 0.63 WT: LB SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
CRISPIN VALVE. ANY REPRODUCTION IN  
PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF CRISPIN VALVE IS  
PROHIBITED.

DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1