


SL(A) & S(A) Series Air & Vacuum Sewer Valves, AWWA C512

S(A) Series High Capacity Air & Vacuum Sewer Valve, Size 6"-10"

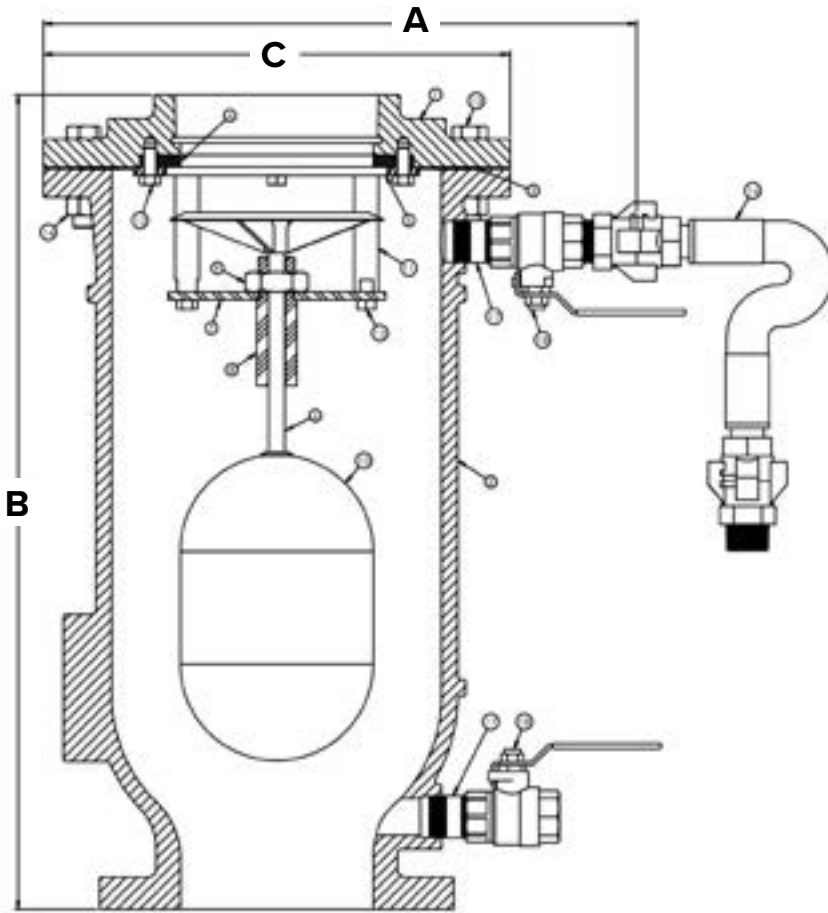

S(A) Series Parts List

ITEM	DESCRIPTION	MATERIAL
1	COVER FLANGE	Cast Iron
2	BODY	Cast Iron
3	COVER GASKET	Armstrong
4	SEAT	Buna-N Rubber
5	SEAT RETAINER	Stainless Steel (SS)
6	VALVE	SS
7	ROD GUIDE STAND	SS
8	FLOAT ROD GUIDE	Nylatron
9	FLOAT GUIDE NUT	SS
10	FLOAT	SS
11	STAND OFF	SS
12	SEAT RETAINER BOLT	SS
13	COVER BOLT	Steel
14	COVER NUT	Steel

OPTIONAL BACKFLUSH ATTACHMENTS

ITEM	DESCRIPTION	MATERIAL
16	HOSE	CAD. Plated Stee Rbr
17	NIPPLE	Steel
18	BALL VALVE	Bronze

S(A) Series Dimensional Data

ALL DIMENSIONS ARE IN INCHES. CERTIFIED DIMENSIONS ALSO AVAILABLE.

MODEL	INLET	OUTLET	HT (B)	HT w/BF	WD (C)	WD w/BF (A)	WT (lbs)	WT w/BF
S61A	6" CL 125	6" NPT	25.31		14.50		192	
S61AB	6" CL 125	6" NPT		25.31		18.44		325
S62A	6" CL 250	6" NPT	25.75		14.50		208	
S62AB	6" CL 250	6" NPT		25.75		18.44		341
S81A	8" CL 125	8" NPT	25.56		17.75		294	
S81AB	8" CL 125	8" NPT		25.56		21.19		522
S82A	8" CL 250	8" NPT	26.06		17.75		322	
S82AB	8" CL 250	8" NPT		26.06		21.19		550
S101A	10" CL 125	10" NPT	36.58		21.25		530	
S101AB	10" CL 125	10" NPT		36.58		24.69		852
S102A	10" CL 250	10" NPT	37.27		21.25		533	
S102AB	10" CL 250	10" NPT		37.27		24.69		855

Optional Backflush Attachment on Sizes 6" and up includes two 1" blow-off valves and five feet of 1" hose with quick disconnect attachments.

Crispin's S(A) and S Series Valves are available in pressure ratings of 2-40psi, 20-150psi or 151-300psi



PRODUCT LINE
SL(A) & S(A) Air & Vacuum Sewer Valves

SHEET
S(A) Series Dimensions and Materials List

DATE
1/19/2024

REVISION
0

DOC. NO.
D-AV-SA-6-10-DIMS-ML-r0