


SL(A), S(A) & S(AS) Series Air & Vacuum Sewer Valves, AWWA C512

S(AS) Series Short Body Air & Vacuum Sewer Valve, Sizes 1"-2"

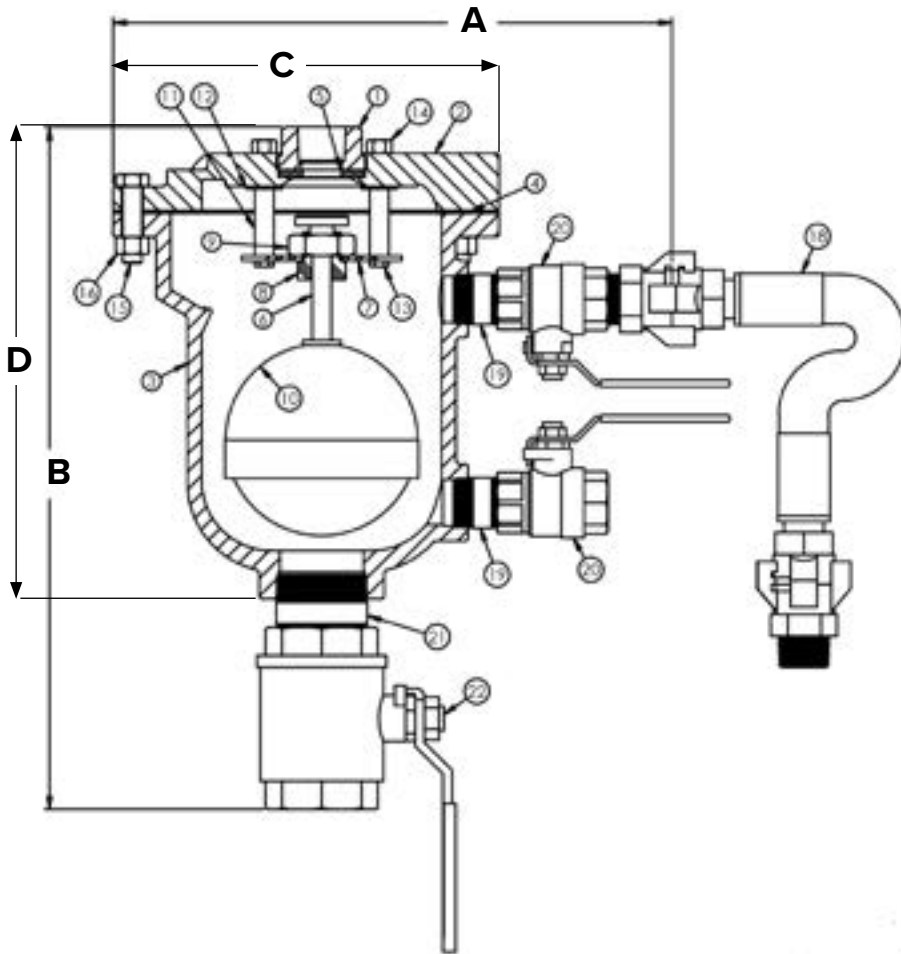

S(AS) Series Parts List

ITEM	DESCRIPTION	MATERIAL
1	TOP	Ductile Iron
2	COVER FLANGE	Ductile Iron
3	BODY	Ductile Iron
4	COVER GASKET	Armstrong
5	SEAT	Buna-N Rubber
6	VALVE	Stainless Steel (SS)
7	ROD GUIDE STAND	SS
8	FLOAT ROD GUIDE	Nylatron
9	ROD GUIDE NUT	SS
10	FLOAT	SS
11	STAND OFF	SS
12	STAND OFF WASHER	Fiber
13	STAND OFF BOLT	SS
14	STAND OFF NUT	Steel
15	COVER BOLT	Steel
16	COVER NUT	Steel

OPTIONAL BACKFLUSH ATTACHMENTS

ITEM	DESCRIPTION	MATERIAL
18	HOSE	CAD. Plated Steel, Rubber
19	NIPPLE	Steel
20	BALL VALVE	Bronze
21	NIPPLE	Steel
22	BALL VALVE	Bronze

S(AS) & S(ASB) Series Dimensional Data

ALL DIMENSIONS ARE IN INCHES. CERTIFIED DIMENSIONS ALSO AVAILABLE.

MODEL	INLET	OUTLET	HT (D)	HT w/ BF (B)	WD (C)	WD w/ BF (A)	WT (lbs)	WT w/ BF
S10AS	2" NPT	1" NPT	12.31		10.06		47	
S10ASB	2" NPT	1" NPT		17.81		14.56		62
S20AS	2" NPT	2" NPT	12.75		10.06		47	
S20ASB	2" NPT	2" NPT		18.25		14.56		62

Optional Backflush Attachment includes an isolation ball valve, two 1" blow-off valves and five feet of 1" hose with quick disconnect attachments.

Crispin's S(A) and SL(A) Series Valves are available in pressure ratings of 2-40psi, 20-150psi or 151-300psi.



PRODUCT LINE
SL(A), S(A) & S(AS) Air & Vacuum Sewer Valves

SHEET
S(AS) Series Dimensions and Materials List

DATE
1/19/2024

REVISION
0

DOC. NO.
D-AV-SAS-DIMS-ML-r0