



Options and Extensions for Traveling Nut Actuator, AWWA C504




A1

STANDARD NUT ORIENTATION




A2

OPTIONAL NUT ORIENTATION



A2

OPTIONAL HANDWHEEL ORIENTATION

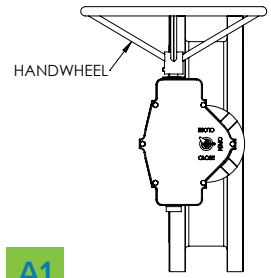

A1

STANDARD HANDWHEEL ORIENTATION

We work with all major actuator manufacturers, and can mount any type—manual, electric or pneumatic—that our customers specify. Popular options are listed below, but we invite you to call the factory with any additional requests or questions that you may have.

MANUAL ACTUATION OPTIONS

Above Ground Manual Actuators

- Sizes 3-8": Lever Actuators w/ten position selector plate.
- All sizes: Wheel and Chainwheel Gear Actuators, standard w/dial position indicators.

Buried & Submerged Service Gear Actuators

- All sizes: Standard w/sealed gear housing and a 2" AWWA nut. For gears continuously submerged at depths ≥ 10 ft, indicate specs to ensure a gear for intended service.

POWER ACTUATION OPTIONS

Cylinder Actuators

- All sizes: Pneumatic or Hydraulic options available. Also available: Double Acting Operators or Spring Return for failure mode (fail open or fail close); On/Off Modulating Service.

Electric Actuators (EMO)

- All sizes: Several configurations for service conditions available. Control options for On/Off or Modulating Service.

EXTENSION OPTIONS


A. 2" Drive Nut w/Extension Stem

D. EMO w/Extended Bonnet


B. TNA w/Extension Stem & Indicating Floor Stand

E. TNA w/Extended Bonnet


C. EMO w/Extended Bonnet & Non-Indicating Floor Stand

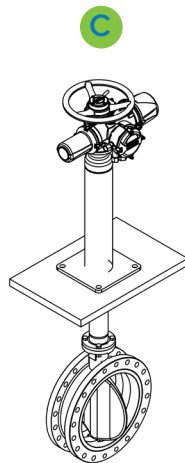


A




B



D



E



PRODUCT LINE

Traveling Nut Actuator for KFLo 500 Series

SHEET

Options and Extensions

DATE

12/1/22

REVISION

0

DOC. NO.

D-BF-500-TNA-OPTIONS-r0