


SWC Series Swing Check Valves, Sizes 3"-36", AWWA C508

SWC SERIES FLOW CHARACTERISTICS

Head Loss Chart*

*Head loss charts are for flow when valve is positioned with the seat downstream.
Maximum full-open velocity is 16 ft/sec based on nominal valve size per AWWA C508 standards.

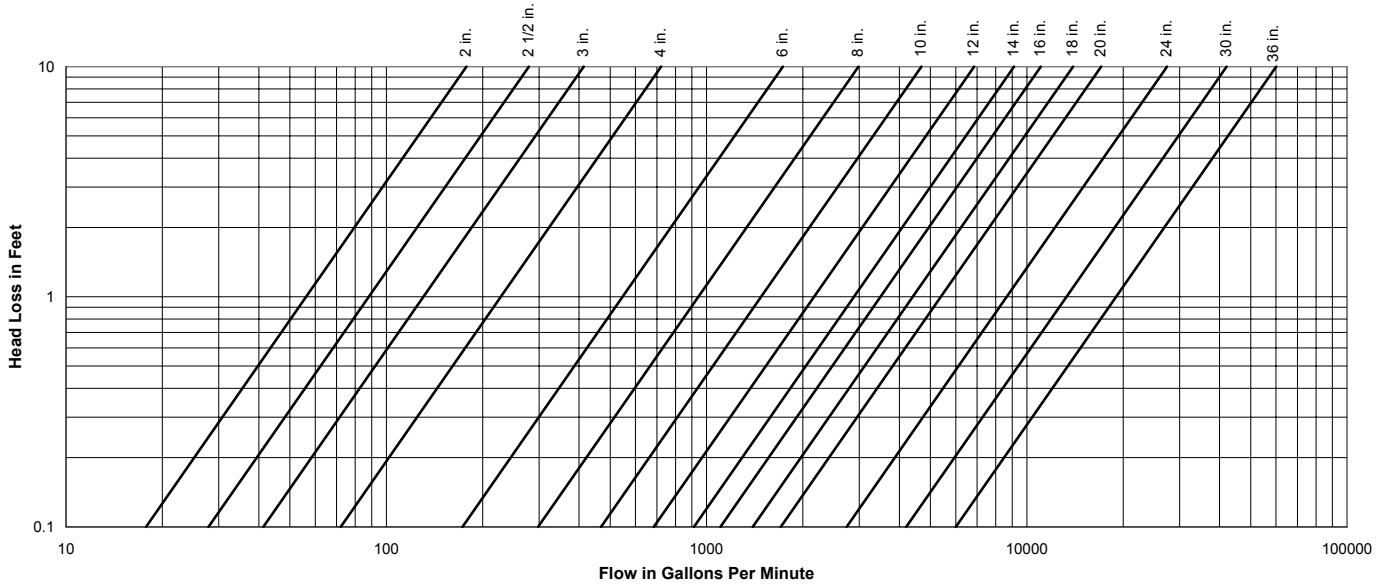

PRODUCT LINE

SWC Series Swing Check Valves, Sizes 3"-36"

SHEET

SWC Series Flow Characteristics

DATE

3/18/2025

REVISION

0

DOC. NO.

D-CV-SWC-FLOW-r0