


SWL SERIES FLOW CHARACTERISTICS

Head Loss Chart*

*Head loss charts are for flow when valve is positioned with the seat downstream.
Maximum full-open velocity is 16 ft/sec based on nominal valve size per AWWA C508 standards.

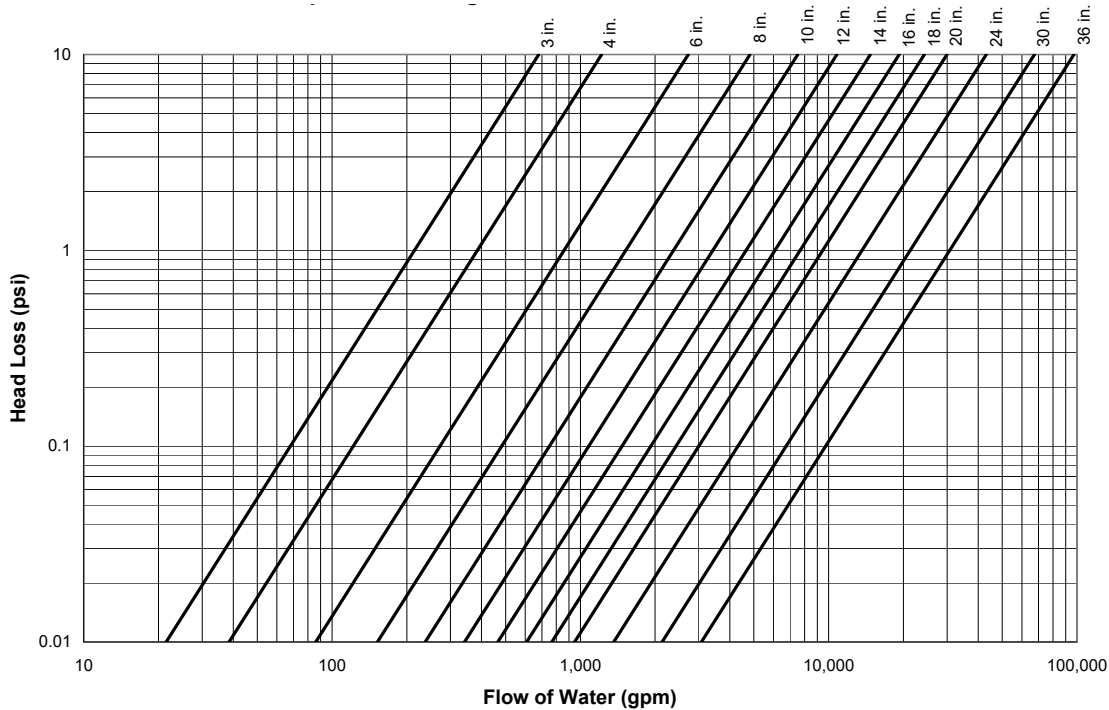

PRODUCT LINE
SWL Series Swing Check Valves, Sizes 2" -36"
SHEET
SWL Series Flow Characteristics

DATE
4/1/2025
REVISION
1
DOC. NO.
D-CV-SWL-FLOW-r1