


Flow Characteristics, KFlo 500 Series Butterfly Valves, 3"-20", AWWA C504, CI 150B

Head Loss Chart*

*Head loss charts are for flow when valve is positioned with the seat downstream.
 Maximum full-open velocity is 16 ft/sec based on nominal valve size per AWWA C504 standards.

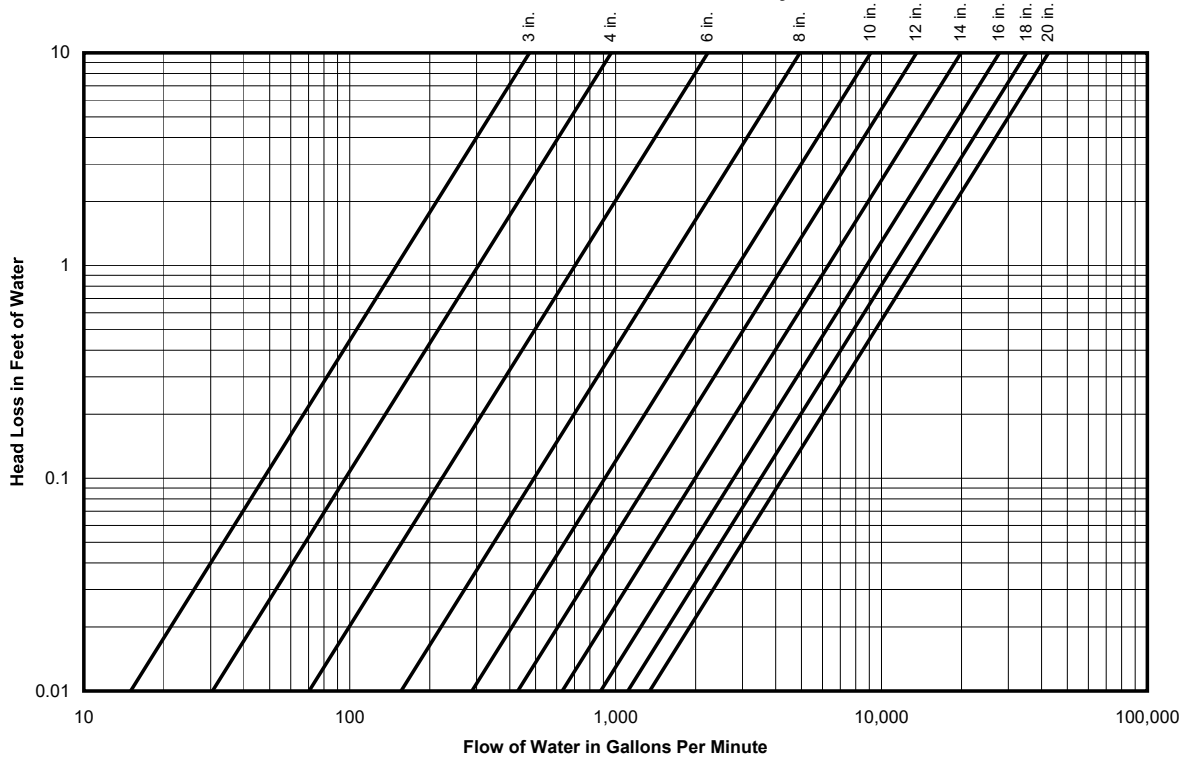

PRODUCT LINE KFlo 500 Series Butterfly Valve, 3"-20"	DATE 11/30/22	REVISION 0
SHEET Flow Characteristics	DOC. NO. DW-BF-500-FLOW-r0	