


8 7 6 5 4 3 2 1

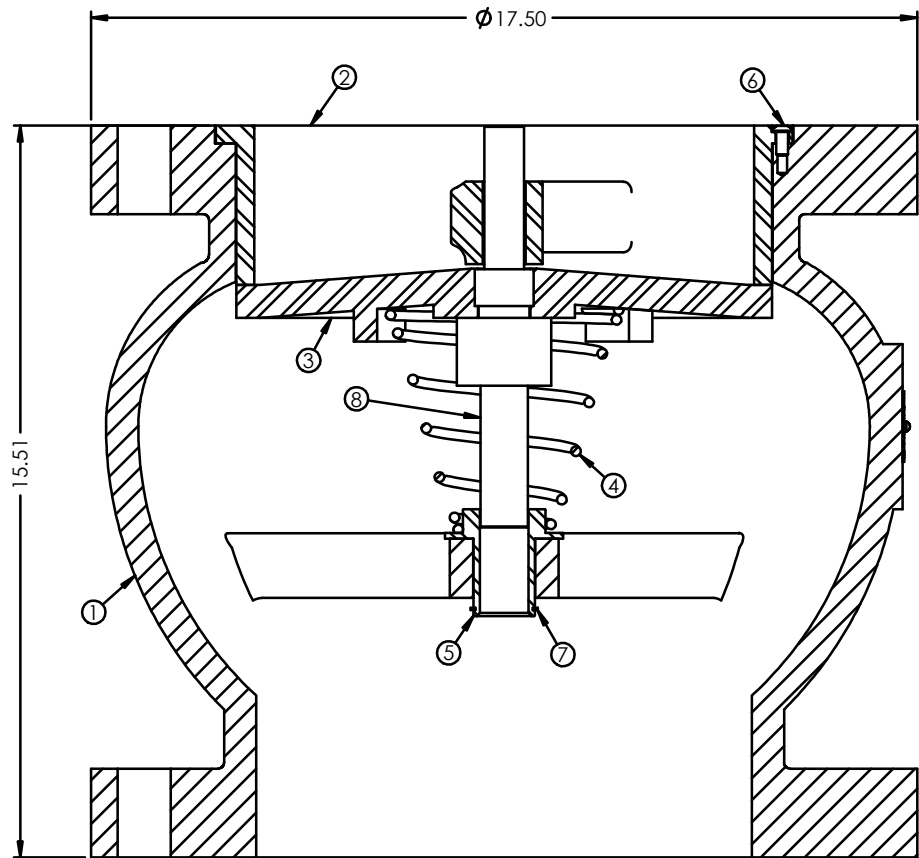

PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	1010-1FH	BODY	DUCTILE IRON	1
2	1010-2	SEAT RING	AL-BRONZE	1
3	1010-3	DISC	AL-BRONZE	1
4	1010-4	SPRING	STAINLESS STEEL	1
5	1010-5	BUSHING	AL-BRONZE	1
6	BHCS.25X.500	SCREW	STAINLESS STEEL	2
7	1010-8	RETAINING RING	STAINLESS STEEL	1
8	1010-30	SHAFT	AL-BRONZE	1

FLANGE DATA	
FLANGE DIAMETER	17.50 in.
FLANGE THICKNESS	1.88 in.
BOLT CIRCLE DIAMETER	15.25 in.
NUMBER OF BOLT HOLES	16
BOLT HOLE DIAMETER	1.12 in.

- NOTES:**
- INLET SIZE: 10" CL. 300 FLANGED
OUTLET SIZE: 10" CL. 300 FLANGED
 - APPROXIMATE WEIGHT: 275 lbs
 - VALVE WILL BE COATED EXTERNALLY WITH PHENOLIC ALKYD PRIMER

REV.	DESCRIPTION	DATE	APPROVED
1	REDRAWN IN SOLIDWORKS	10-5-21	BJL

REVISIONS			TITLE:
REV.	DESCRIPTION	DATE	
1	REDRAWN IN SOLIDWORKS	10-5-21	CRISPIN VALVES
1	REDRAWN IN SOLIDWORKS	10-5-21	
			10" CL. 300 GLOBE CHECK VALVE

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	DJF 10-5-21
XX DIMENSIONS	±.1	CHECKED	-
XXX DIMENSIONS	±.01	ENG APPR.	-
XXXX DIMENSIONS	±.005	MFG APPR.	-
DRILLED HOLES	±.01	Q.A.	-
ANGLES	±.1°	FILE LOCATION: \\S2\sl1\Drawings\ASSEMBLY\GC\	
CONCENTRIC DIAMETERS	SEE BELOW	FILE NAME: GC103 8280545 r1	
MACHINED	005 TIR	MATERIAL: PER BOM	
MACHINED TO CAST	02 TIR	FINISH:	
MACHINED SURFACES	125 BMS	DO NOT SCALE DRAWING	
REMOVE CHAMFERS			
BREAK SHARP EDGES			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRISPIN VALVE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRISPIN VALVE IS PROHIBITED.

SIZE	DWG. NO.	REV
B	GC103 8280545	1
SCALE: 0.38:1	WT: LB	SHEET 1 OF 1

8 7 6 5 4 3 2 1