


8 7 6 5 4 3 2 1

D

C

B

A

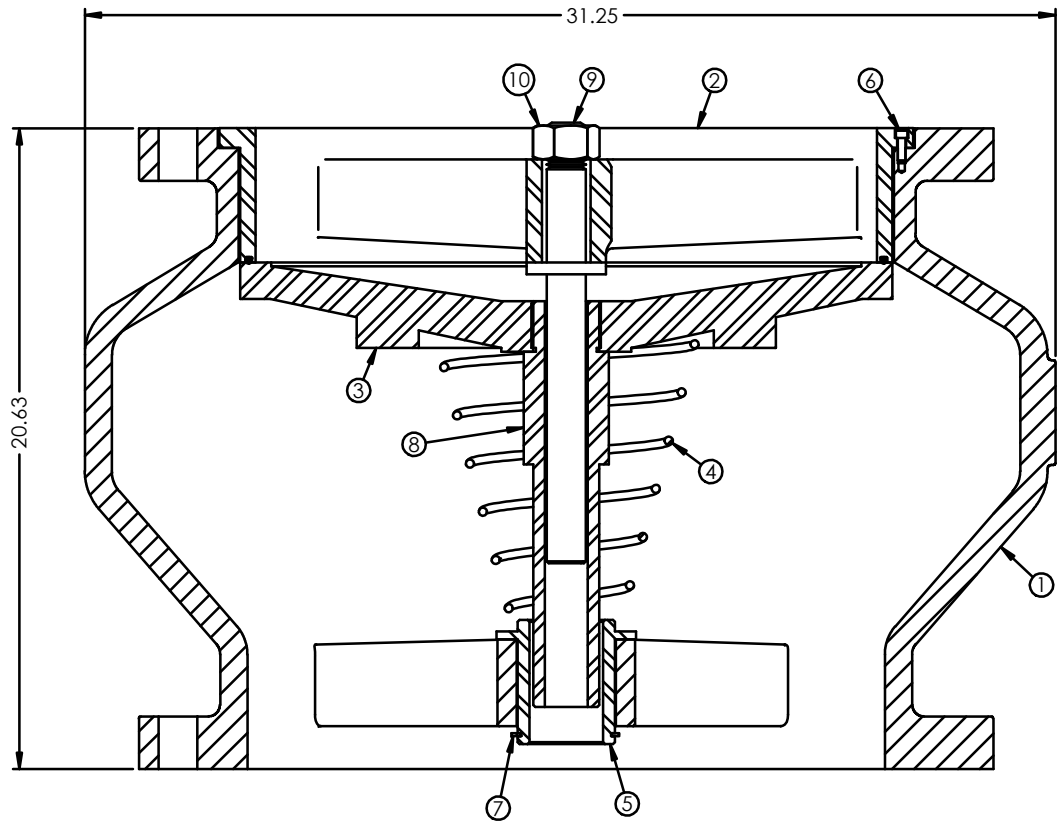

PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	2020-1F	BODY	DUCTILE IRON	1
2	2020-2R	RESILIENT SEAT RING	BUNA-N & AL-BRZ	1
3	2020-3	DISC	AL-BRONZE	1
4	2020-4	SPRING	STAINLESS STEEL	1
5	2020-5	BUSHING	AL-BRONZE	1
6	SHCS.25X.75	SCREW	STAINLESS STEEL	8
7	2020-8	RETAINING RING	STAINLESS STEEL	1
8	2020-30A	DISC SHAFT	AL-BRONZE	1
9	2020-30B	SEAT SHAFT	STAINLESS STEEL	1
10	FHN1.25-7	SHAFT NUT	STAINLESS STEEL	1

FLANGE DATA	
FLANGE DIAMETER	27.50 in.
FLANGE THICKNESS	1.69 in.
BOLT CIRCLE DIAMETER	25.00 in.
NUMBER OF BOLT HOLES	20
BOLT HOLE DIAMETER	1.25 in.

- NOTES:**
- INLET SIZE: 20" CL. 150 FLANGED
OUTLET SIZE: 20" CL. 150 FLANGED
 - APPROXIMATE WEIGHT: 815 lbs
 - VALVE WILL BE COATED EXTERNALLY WITH PHENOLIC ALKYD PRIMER

REV.	DESCRIPTION	DATE	APPROVED
1	REDRAWN IN SOLIDWORKS	9-23-21	BJL

REVISIONS			TITLE:
REV.	DESCRIPTION	DATE	
1	REDRAWN IN SOLIDWORKS	9-23-21	CRISPIN VALVES
REV.	DESCRIPTION	DATE	
			20" CL. 150 RESILIENT SEAT GLOBE CHECK VALVE
SIZE	DWG. NO.	REV	
B	GC201.R 8280777	1	
SCALE: 0.25:1	WT: LB	SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN INCHES	DJF	9-23-21
XX DIMENSIONS		
XXX DIMENSIONS		
XXXX DIMENSIONS		
DRILLED HOLES		
ANGLES		
CONCENTRIC DIAMETERS		
MACHINED		
MACHINED TO CAST		
MACHINED SURFACES		
REMOVE CHAMFERS		
BREAK SHARP EDGES		
MATERIAL:	FILE LOCATION: \\S2\sl1\Drawings\ASSEMBLY\GC\	
FINISH:	FILE NAME: GC201.R 8280777.r1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRISPIN VALVE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRISPIN VALVE IS PROHIBITED.

DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1