


8 7 6 5 4 3 2 1

D

C

B

A

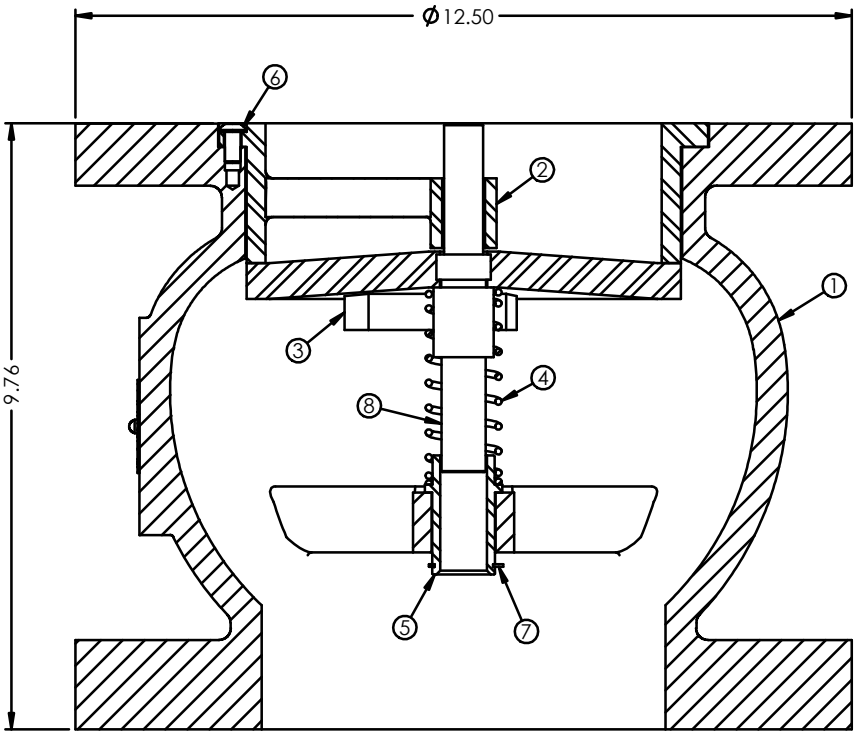

PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	606-1FH	BODY	DUCTILE IRON	1
2	606-2	SEAT RING	AL-BRONZE	1
3	606-3	DISC	AL-BRONZE	1
4	606-4	SPRING	STAINLESS STEEL	1
5	606-5	BUSHING	AL-BRONZE	1
6	BHCS.25X.50	SCREW	STAINLESS STEEL	2
7	606-8	RETAINING RING	STAINLESS STEEL	1
8	606-30	SHAFT	AL-BRONZE	1

FLANGE DATA	
FLANGE DIAMETER	12.50 in.
FLANGE THICKNESS	1.44 in.
BOLT CIRCLE DIAMETER	10.62 in.
NUMBER OF BOLT HOLES	12
BOLT HOLE DIAMETER	0.88 in.

- NOTES:**
- INLET SIZE: 6" CL. 300 FLANGED
OUTLET SIZE: 6" CL. 300 FLANGED
 - APPROXIMATE WEIGHT: 101 lbs
 - VALVE WILL BE COATED EXTERNALLY WITH PHENOLIC ALKYD PRIMER

REV.	DESCRIPTION	DATE	APPROVED
1	REDRAWN IN SOLIDWORKS	10-5-21	BJL

REVISIONS			TITLE:
REV.	DESCRIPTION	DATE	
1	REDRAWN IN SOLIDWORKS	10-5-21	CRISPIN VALVES
1	6" CL. 300 GLOBE CHECK VALVE		

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	DJF 10-5-21
XX DIMENSIONS	±.1	CHECKED	- -
XXX DIMENSIONS	±.01	ENG APPR.	- -
XXXX DIMENSIONS	±.005	MFG APPR.	- -
DRILLED HOLES	±.01	Q.A.	- -
ANGLES	±1°		
CONCENTRIC DIAMETERS	SEE BELOW		
MACHINED	005 TIR		
MACHINED TO CAST	02 TIR		
MACHINED SURFACES	125 BMS		
REMOVE CHAMFERS			
BREAK SHARP EDGES			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRISPIN VALVE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRISPIN VALVE IS PROHIBITED.

MATERIAL:	PER BOM	FILE LOCATION:	\\S2\51\Drawings\ASSEMBLY\GC\
FINISH:		FILE NAME:	GC63 8280417.r1

SIZE	DWG. NO.	REV
B	GC63 8280417	1
SCALE: 0.5:1	WT: LB	SHEET 1 OF 1

8 7 6 5 4 3 2 1