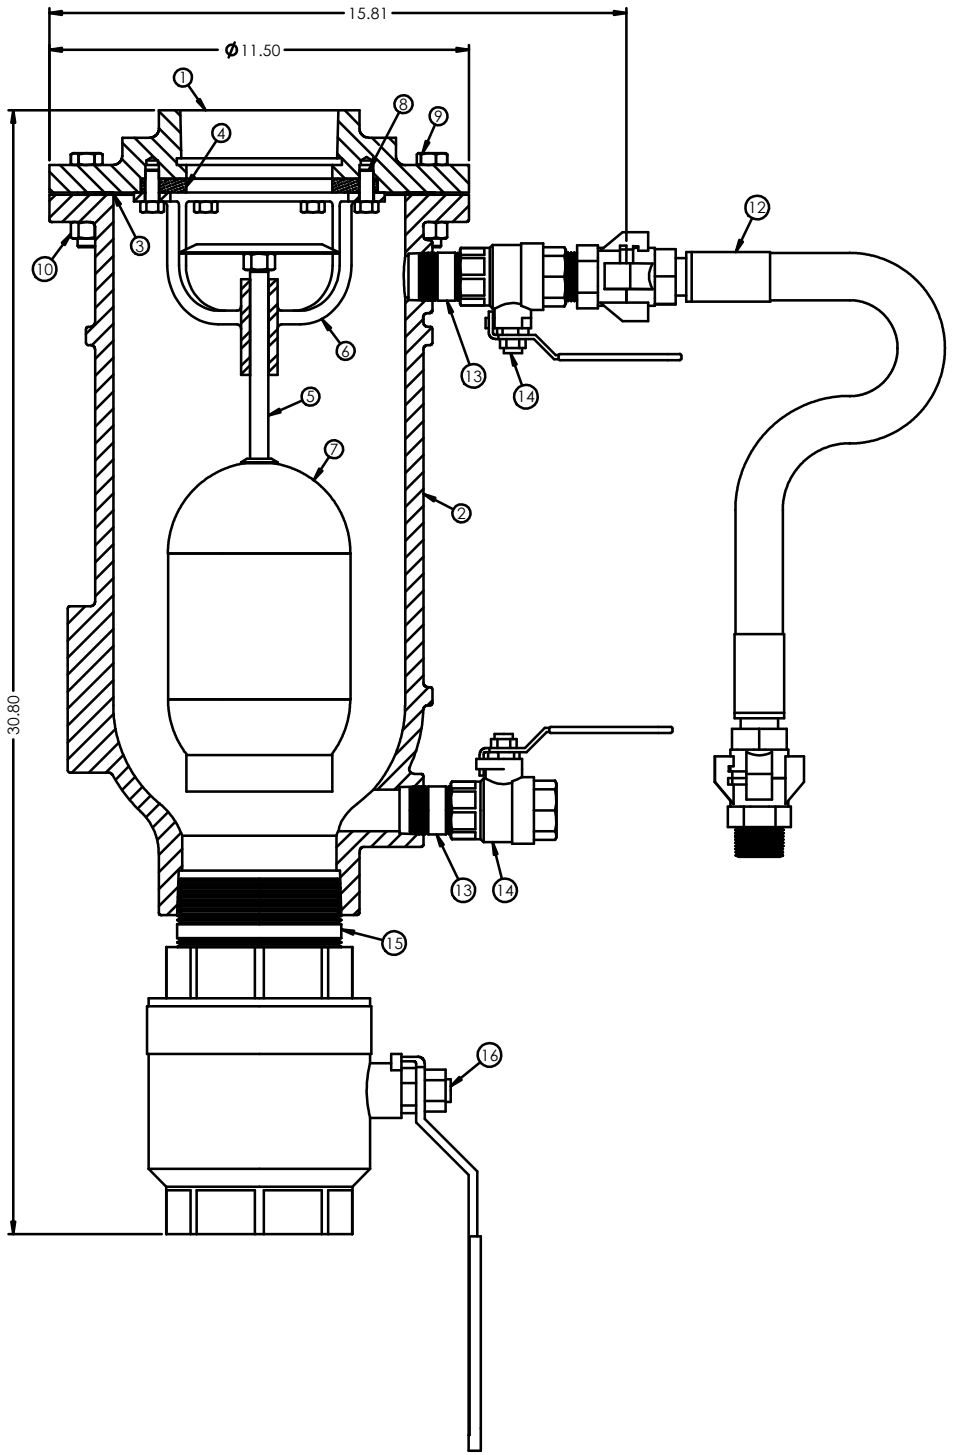

SEWER AIR / VACUUM RELEASE VALVE PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	36-A4X-2	COVER FLANGE	CAST IRON	1
2	36-A4-3	BODY	CAST IRON	1
3	36-A4-4	COVER GASKET	ARMSTRONG	1
4	36-A4X-5	SEAT	BUNA-N RUBBER	1
5	36-A4-6	VALVE	STAINLESS STEEL	1
6	29-16X	FLOAT GUIDE STAND	STAINLESS STEEL	1
7	36-A3-9	FLOAT	STAINLESS STEEL	1
8	HHCS.375X.88	SEAT RETAINER BOLT	STAINLESS STEEL	6
9	HHCS.5X2.5	COVER BOLT	STEEL	8
10	FHN.5-13	COVER NUT	STEEL	8
BACK FLUSHING PARTS LIST				
12	HA 1X5	HOSE	CAD. PLT STL, RUBBER	1
13	NPL 1XC	NIPPLE	STEEL	2
14	BV-1	BALL VALVE	BRONZE	2
15	NPL 4XC	NIPPLE	STEEL	1
16	BV-4	BALL VALVE	BRONZE	1

NOTES:
1. INLET SIZE: 4" NPT
   OUTLET SIZE: 4" NPT
2. APPROXIMATE WEIGHT: 112 lbs
3. VALVE WILL BE COATED EXTERNALLY WITH PHENOLIC ALKYD PRIMER

REV.	DESCRIPTION	DATE	APPROVED
1	REDRAWN IN SOLIDWORKS	10-22-21	

REVISIONS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRISPIN VALVES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRISPIN VALVES IS PROHIBITED.
DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
X.X DIMENSIONS ±.1
X.XX DIMENSIONS ±.01
X.XXX DIMENSIONS ±.005
DRILLED HOLES ±.01
ANGLES ±1°
CONCENTRIC DIAMETERS SEE BELOW
MACHINED 63 RMS
MACHINED TO CAST .02 TIR
MACHINED SURFACES 125 RMS
REMOVE BURRS
BREAK SHARP EDGES
MATERIAL:
FINISH: -

	NAME	DATE
DRAWN	DJF	10-22-21
CHECKED	-	-
ENG APPR.	-	-
MFG APPR.	-	-
Q.A.	-	-

FILE LOCATION: \\S2\s1\Drawings\ASSEMBLY\SAVV\
FILE NAME: S40AB 8278554 r1

CRISPIN VALVES

TITLE: 4" NPT, HIGH CAPACITY SEWER AIR / VACUUM RELEASE VALVE W/ BACK FLUSH

SIZE C | DWG. NO. S40AB 8278554 | REV 1

SCALE: 0.38:1 | WT: LB | SHEET 1 OF 1