


8 7 6 5 4 3 2 1

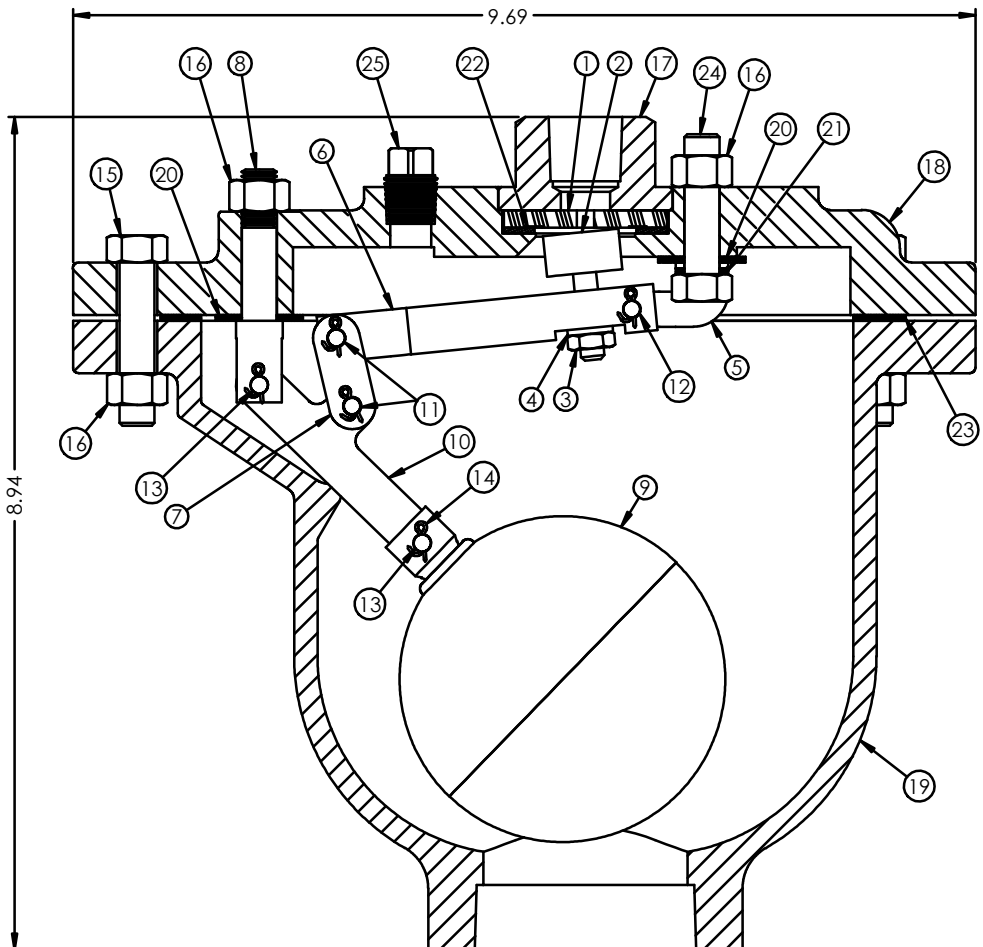

PARTS LIST				
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	13-1N	PRESSURE SEAT	PVC	1
2	15-4N	VALVE PLUNGER	BUNA-N & S/S	1
3	FJHN.25-28	PLUNGER NUT	STAINLESS STEEL	1
4	LW.25	LOCK WASHER	STAINLESS STEEL	1
5	13-5R	VALVE FULCRUM	STAINLESS STEEL	1
6	26-6S	VALVE LEVER	STAINLESS STEEL	1
7	13-7R	LINK	STAINLESS STEEL	2
8	13-8R	FLOAT FULCRUM	STAINLESS STEEL	1
9	26-9R-L	FLOAT	STAINLESS STEEL	1
10	26-8R	FLOAT LEVER	STAINLESS STEEL	1
11	13-11R	BEARING PIN	STAINLESS STEEL	2
12	13-12R	BEARING PIN	STAINLESS STEEL	1
13	13-11AR	BEARING PIN	STAINLESS STEEL	2
14	18-7A	COTTER PIN	STAINLESS STEEL	5
15	HHCS.375X1.75	COVER BOLT	STEEL	7
16	FHN.375-16	NUT	STEEL	9
17	1-1S	TOP	DUCTILE IRON	1
18	13-20	COVER FLANGE	DUCTILE IRON	1
19	13-21HL	BODY	DUCTILE IRON	1
20	13-22	FULCRUM WASHER	FIBER	2
21	13-26	FULCRUM WASHER	FIBER	1
22	13-23	SEAT GASKET	BUNA-N RUBBER	1
23	13-24	COVER GASKET	ARMSTRONG	1
24	HHCS.375X1.5	FULCRUM BOLT	STAINLESS STEEL	1
25	PLG.25	FLANGE PLUG	BRASS	1
26	PLG.5	BODY PLUG	BRASS	1

ORIFICE DATA	
DIAMETER	MAX. WORKING PRESSURE
5/16"	30 in Hg

NOTE:
 1. INLET SIZE: 2" NPT
 OUTLET SIZE: 1/2" NPT
 APPROXIMATE WEIGHT: 22 lbs
 2. VALVE WILL BE COATED EXTERNALLY
 WITH PHENOLIC ALKYD PRIMER
 3.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 CRISPIN VALVE. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF CRISPIN VALVE IS
 PROHIBITED.

DO NOT SCALE DRAWING

1	REDRAWN IN SOLIDWORKS		
REV.	DESCRIPTION	DATE	APPROVED

REVISIONS		
NO.	NAME	DATE
DRAWN	DJF	10-15-19
CHECKED	-	-
ENG APPR.	-	-
MFG APPR.	-	-
Q.A.	-	-

CRISPIN VALVES

TITLE:
**2" VACUUM
 PRIMING VALVE**

FILE LOCATION:
 \\S2\sl\drawings\ASSEMBLY\VPV\

FILE NAME: VPL10A.r1

SIZE B	DWG. NO. PL10A	REV 3
SCALE: 0.75:1	WT: LB	SHEET 1 OF 1

8 7 6 5 4 3 2 1